

Buoys

Type CB 260-1100:


Strong, foam filled and unsinkable buoys, particularly well suitable for mooring fish cages and other aquaculture applications. The buoys are fitted with a high quality galvanized steel rod (2,8 cm ST 52) and swivel. Standard color is red.



Art. no	Diam (cm)	Length (cm)	Weight (kg)	Buoyancy (kg)
CB260	55	158	30,5	260
CB440	75,7	158	45,5	440
CB680	91	158	50,5	680
CB1100	116	158	69	1100

Type LAB 650-1850:

Foam filled and unsinkable buoys. The buoys are reinforced with solid galvanised steel plates (ST52) connected with galvanised steel rods going through the core. Standard color is red.

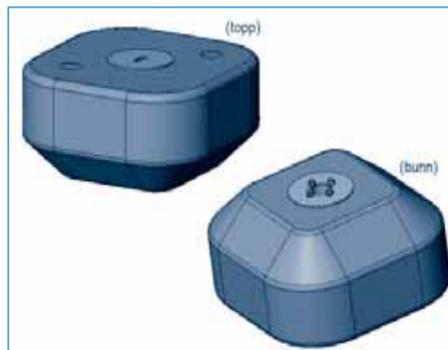

LAB-Buoys

Art. no	Size (cm)	Length (cm)	Weight (kg)	Buoyancy (kg)
LAB 650	100x100	128	110	650
LAB 975	100x100	165	135	975
LAB 1250	100x100	200	165	1250
LAB 2000	180x180	182	370	2100

Type Pre-Buoys:

Developed for Aquaculture and anchoring. Moulded from 8 mm polyethelene with polystyrene infill (250 kg/m³). Because of the shape of the buoy, you can use it vertical as well as horizontal. It features a new improved reinforced top plate, and the chain will not damage the buoy with sideways forces. The wall thickness is 8 mm, which is also more than normal.

Art. no	Diam (cm)	Length (cm)	Weight (kg)	Buoyancy (kg)
600	120	113	60	540
750	120	145	65	685
850	120	143	73	775
1000	120	172	82	920
1100	120	163	95	1005
1250	120	195	105	1150
1350	120	188	118	1230
1500	120	220	122	1375
1600	120	213	130	1470
1750	120	245	135	1605

PRE-Buoys



Buoys